




// ONE BRAND // ONE SOURCE // ONE SYSTEM



Tyre Fitting & Handling

Our complete range of tyre fitting and handling products.

TYRE FITTING AND HANDLING

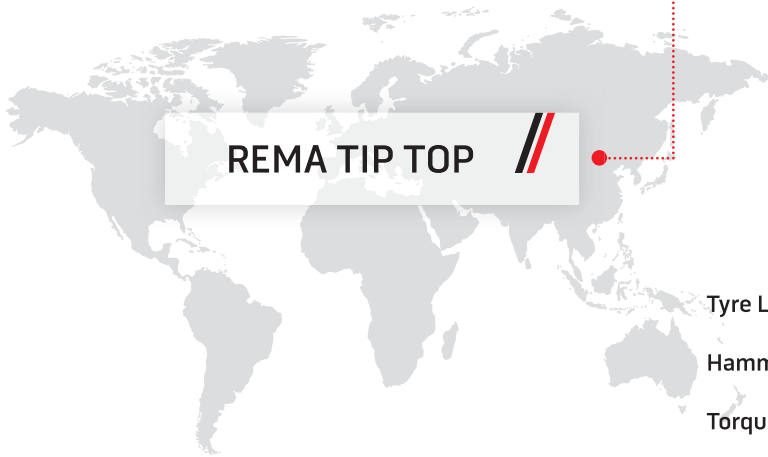

REMA TIP TOP

Tyre Levers	62
Hammers and Handles	71
Torque Wrenches	73
Tyre and Wheel Handlers	75
Mounting Tools	76
Sealing Rings	83
Regrooving	86
Tyre Branding	87
Wheel Braces	90
Standard Sockets	91
Impact Sockets	91
Torque Sockets	97
Wheel Lock Keys	98
Gauges	99
Marker Pens, Sticks, Ink and Applicators	102
Safety and PPE	103
Mounting/demounting compunds	106
Chemical Products	109
Spray Bottles & Hand Cleaner	110
Brushes	112
Wheel Nut Precision, Retention and Indication	113
Stud and Bolt Cleaners	117
Dip Tanks	118

TYRE FITTING AND HANDLING

Tyre Levers

Tyre Levers - tubeless tyres



150648



150650



150651



150652



150655



150656

Ref. No.	Description	Length			
150648	Tyre lever T/L, rim tool	930 mm	•	•	
150650	Tyre lever TL1	830 mm	•		
150651	Tyre lever TL2	740 mm	•	•	
150652	Tyre lever TL3	730 mm	•	•	
150655	Tyre lever TL5	970 mm	•		
150656	Tyre lever TL6	990 mm	•		



115712



115714



115711



215710



215711

TYRE FITTING AND HANDLING

Tyre Levers

Tyre Levers - tubeless tyres - continued



215708


215712

215713

215715

315712

315713

Ref. No.	Description	Length			
115711	Tyre lever Michelin type, hex set • 2 straight levers to remove tyre from rim • 1 bent lever to position tyre on the rim	930 mm 920 mm		•	
115712	Tyre lever Michelin type, hex straight • Remove tyre from rim	930 mm		•	
115714	Tyre lever Michelin type, hex bent • Position tyre on the rim	920 mm		•	
215708	Tyre lever set, long • Genuine • 2 Halte levers to remove tyre from rim • 1 Force lever to position tyre on the rim	800 mm 750 mm		•	•
215710	Tyre lever Force long • Genuine	750 mm		•	•
215711	Tyre lever Face • Genuine	530 mm		•	•
215712	Tyre lever Halte • Genuine	800 mm		•	•
215713	Tyre lever set • Genuine • 2 Halte levers to remove tyre from rim • 1 Face lever to position tyre on the rim	800 mm 530 mm		•	•
215715	Tyre lever Moto	380 mm	•		
315711	Tyre lever set, flat • 2 flat straight levers to remove tyre from rim (315712) • 1 flat bent lever to position tyre on the rim (315713)	800 mm 745 mm		•	
315712	Tyre lever flat, straight	800 mm		•	
315713	Tyre lever flat, bent	745 mm		•	

TYRE FITTING AND HANDLING

Tyre Levers

Tyre mounting levers



129559



129560



130025



129562



130027



129564


Ref. No.	Description	Length
129559	Tyre lever Chrome	12"
129560	Tyre lever Chrome	16"
130025	Tyre lever Chrome	20"
129562	Tyre lever Chrome	24"
130027	Tyre lever Black	24"
129564	Tyre lever Black type 39 <ul style="list-style-type: none"> Commercial vehicles, agricultural and construction machinery Heavy-duty version 	24"

TYRE FITTING AND HANDLING

Tyre Levers

Tyre mounting levers - Earthmover tyres

Ref. No.	Description	Length	
115713	Tyre lever Emert	740 mm	•
115719	Tyre lever swan neck T41	740 mm	•

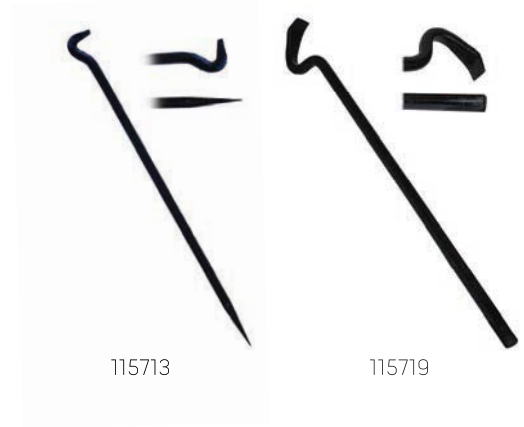

2

Tyre mounting levers - Agricultural



170214



115452

Ref. No.	Description	Length			
170214	Tyre lever long	1030 mm	•	•	•
115452	Tyre Level Agricultural	1320 mm			•

TYRE FITTING AND HANDLING

Tyre Levers

Tyre Levers TNT 200 / 300 style



115702



115703



150660

Ref. No.	Description
115630	Tyre lever TNT 300 Golden tool set <ul style="list-style-type: none"> • demounts 17.5" TO 24.5" and super singles 315 through 445 including most radial and bias ply tires including the X-One super wide • Removable pin adjusts for different tyre sizes
115703	Tyre lever TNT 200 Golden tool set <ul style="list-style-type: none"> • Mounting/Demounting tubeless truck tyres • Genuine set
115702	Tyre lever Golden Buddy set <ul style="list-style-type: none"> • Mounting/ Demounting tubeless truck tyres
150660	Tyre lever Gaither set <ul style="list-style-type: none"> • Remove truck tyres from the rim • Remount tubeless truck tyres to the rim
Accessories	
115690	Tyre lever Golden tool long roller
115691	Tyre lever Golden tool short roller
115692	Tyre lever Golden tool long pin
115695	Tyre lever Golden tool long pin 50 mm
115696	Tyre lever Golden tool long pin 44 mm
115750	Golden Buddy replacement roller
115752	Golden Buddy replacement centre roller
5198043	Tyre lever protector, long
5198050	Tyre lever, rim edge protector
150634	Wheel protector, Truck



150630



5198043



5198050



150634

TYRE FITTING AND HANDLING
Tyre Levers

Tyre Levers Gaither



150665



150666



150667

Ref. No.	Description
150665	Gaither lever bar
150666	Gaither beaver tail Mounting lever tubeless tyres
	Accessories
150662	Gaither clevis
150667	Gaither right wing-clevis
150669	Gaither wing bolts
150670	Gaither rollers-clevis
150672	Gaither roller beaver tail
150677	Gaither crook end
150678	Gaither spoon end

TYRE FITTING AND HANDLING

Tyre Levers

Bead Keepers



150661



150664



150663



115402



115406



115405



115403

Ref. No.	Description
	Bead Keepers
150661	Gaither bead keeper coated <ul style="list-style-type: none"> Stops bead from moving while fitting For aluminium or chromed wheels
150663	Gaither bead keeper <ul style="list-style-type: none"> Stops bead from moving while fitting For steel wheels
150664	Gaither clevis assist
115402	Tyre L P102 Wedge <ul style="list-style-type: none"> Wedges to be used in conjunction with the PRT Tool (115408) as a stripping aid The wedge guides the tyre with stiffer side walls into the drop centre when you are demounting.
115406	Pneu-Tek Ag102 Bead Wedge
115405	Pneu-Tek Tyre-Loc P103 Tyre Keeper
115403	Pneu-Tek Ag Tyre-Loc AG103 Lock

TYRE FITTING AND HANDLING

Tyre Levers

Tyre Lever Demount Tool

- Demounts Tyres in seconds, no effort required.
- Driven by ½ impact wrench



115408



Ref. No.	Description
115408	PRT Impact Driven Demount Tool

Tyre spreaders



9170777



9942509



113317



5198780

Ref. No.	Description	Spreading range	Weight				
9170777	Repair Boy, mechanical • Tyre spreader for preparing the inspection and repair of car and motorcycle tyres • The tyre can be inspected and prepared on the inside and outside • Comfortable working height • The tyre can be turned and inclined into the perfect working position (patented mechanism) • Integrated tray for tools and materials		26 kg	•	•		
9942509	Pneumatic passenger tyre spreader • Integrated tray for tools and materials • Working fixed light to illuminate the inside & make the repair work easy.				•		
113317	Truck tyre spreader					•	•
5198780	Truck / EM tyre spreader • For preparing the inspection and repair of truck and car tyres • Easy operation • Wide spreading range • Suitable for very stiff beads includes: • Clamping mechanism • 5810030 1 Instruction manual	50-600 mm	4.4 kg			•	•

TYRE FITTING AND HANDLING

Tyre Levers

Tyre lift spreader



5199150

Ref. No.	Description	Weight	Tyre size	Lifting capacity at 12 bar	Lifting capacity at 15 bar	Lifting height	Size W x D x H
5199150	<p>Tyre lift spreader</p> <ul style="list-style-type: none"> • For inspection and repair of tractor, truck, EM/OTR and industrial tyres • Enough clearance to keep your feet safe • Extremely low roll-on height (200 mm), spreader cylinder with hand and foot control • Pneumatic system lifts the tyre to the desired working height • Pneumatically controlled opening of the spreader claws • Designed for one-man operation 	150 kg	max. 18R22.5	approx. 200 kg	approx. 300 kg	max. 450 mm	1150 x 780 x 900 mm

Workshop Trolleys



5174518

Ref. No.	Description	Contents
9174518	<p>Workshop Trolley</p> <ul style="list-style-type: none"> • The REMA TIP TOP Workshop Trolley provides suitable space to store your work tools and allow easy movement around the workplace • Comes with 2 handles and 4 castors • Assembled prior to delivery 	each

TYRE FITTING AND HANDLING
Hammers and Handles

Hammers



Ref. No.	Description
115721	Mallet re-head
115726	Rubber Mallet
115727	Sledge hammer 4lb
115729	Sledge hammer 8lb
115745	Sando hammer 4lb, with rubber handle
115746	Sando hammer 10lb, with rubber handle
115749	Dead blow hammer 4lb
115747	Dead blow hammer 10lb
115748	Club Hammer 3lb
115740	Kiwi bead breaking hammer, with wooden handle
115743	Kiwi bead breaking hammer, with fibreglass handle
	Accessories:
115722	Mallet re-head, spare heads

TYRE FITTING AND HANDLING

Hammers and Handles

Hammer Handles



115741



115742

Ref. No.	Description
115741	Hammer handle Kiwi fibreglass
115742	Hammer handle Kiwi wooden

TYRE FITTING AND HANDLING Torque Wrenches

Passanger and light truck



Ref. No.	Description	Drive	Working Range	Accuracy	Length	Weight
115176	Torque wrench, Warren & Brown	1/2"	30-270 Nm	3%	490 mm	2.2 kg
115240	Torque wrench Nortoque 300	1/2"	60-300 Nm	3%	588 mm	1.4 kg
115462	Torque wrench Kuani	1/2"	60-400 Nm	3%	470 mm	1.6 kg

Passanger and light truck



115190, 115206
115200, 115194

Ref. No.	Description	Drive	Working Range	Accuracy	Length	Weight
115190	Torque wrench, Norbar 4R	3/4"	150-700 Nm	4%	1150 mm	6.3 kg
115206	Torque Wrench, Norbar 4AR	3/4"	200-800 Nm	4%	1250 mm	6.4 kg
115200	Torque wrench, Norbar 5R	1"	300-1000 Nm	4%	1475 mm	7.3 kg
115194	Torque wrench Norbar 5AR	1"	700-1500 Nm	4%	1475 mm	10.4 kg

TYRE FITTING AND HANDLING

Torque Wrenches

Torque Wrench Testers



115291

Ref. No.	Description	Drive	Working Range	Accuracy
115291	TorqCheck • Most affordable way to accurately check torque wrenches • Easily mounts in your shop • Maintenance free unit, does not require calibration	1/2"	0-245 Nm	4%

Torque wrench testing - SERVICE

- Torque wrench is checked on a calibrated Norbar Pro Test 1500 test bench
- Tester is recalibrated every 12 months
- Certificate of test result issued for each torque wrench
- Permanent computer record kept of all certified tests
- Verify the accuracy of your torque wrench with this service. On site visit every 6 months or on request.
- Subject to availability of test only.



115295
115298

Ref. No.	Description
115295	Torque wrench test (Two settings) - 1/2" • Torque wrench is tested 5 times on two predetermined settings • 1-4% is maximum allowable each test. Total 10 • Testing should be conducted every 6 months
115298	Torque wrench test (Three settings) - 3/4" • Torque wrench is tested 5 times on three predetermined settings • 1-4% is maximum allowable each test. Total 15 tests • Testing should be conducted every 6 months

TYRE FITTING AND HANDLING

Tyre and Wheel Handlers

Wheel Dolly



• Designed to make lifting truck wheels from ground to stud height easy. The wheel is simply placed on the bearing roller

position near the wheel studs. Lift the handle and the counter balance rollers will position the wheel for you.



113351



113352

Ref. No.	Description
113351	<p>Tyre Dolly Adjustable Long Rollers</p> <ul style="list-style-type: none"> • Wheel dolly - roll, lift, twist, lower. • Easy installation and de-installation of truck wheel assemblies • 1 man control • Heavy duty industrial bearings • 3 positions for rollers depending on size wheel • Great tool for every service truck • Avoid damage to wheel bolts and expensive modern ring • For all wheels from 6.5 – 22.5"
113352	<p>Smart Cart</p> <ul style="list-style-type: none"> • Handy trolley that will clamp onto Tyres & wheels for easy positioning. • Designed to allow the easy movement of stacked, mounted or unmounted tyres.

TYRE FITTING AND HANDLING Mounting Tools

BEAD BAZOOKA™



- The revolutionary Bead Bazooka™ combines the unique rapid air release technology and easiest-to-handle tank for seating tubeless tyre beads. Simply fill the tank, aim the redesigned Double Barrel, and FIRE!!

- The instantaneous blast of air will work on truck (including super singles), passenger, motorcycle, ATV and small AG tires.

Some of its features:

- Most powerful automatic release system available in any bead-seating device
- Smaller tank allows for easier handling in store and service truck
- Push-button trigger allows technician to keep both hands on the tank for more control, making it safer than manual release tanks

- “Slotted” Double Barrel directs the air for best overall lift
- Fully CE & ASME certified
- Patent-pending design, patent-pending RAR system and registered trademark



5193885



5193812

Ref. No.	Description	Size	Weight
5193885	Bead Bazooka™ XL <ul style="list-style-type: none"> • Large 9 litre air reserve • Easy to operate • Enhanced ability for seating tyres 	9 litre	6.8 kg
5193812	Bead Bazooka 12L <ul style="list-style-type: none"> • Has all the same working mechanism as the 9L but with more power • Can be used from passenger tyre right through to smaller tractor tyres 	12 litre	11 kg
Accessories:			
5193898	Bead Bazooka™ switch valve		
5193900	Bead Bazooka™ barrel		
5193901	Bead Bazooka™ gauge		
5193902	Bead Bazooka™ Y connection		
5193903	Bead Bazooka™ inlet valve		
5193904	Bead Bazooka™ safety valve		

TYRE FITTING AND HANDLING

Mounting Tools

Bead Boosters and accessories



5193838



5193907

Ref. No.	Description
5193838	Bead Booster 38L <ul style="list-style-type: none"> • Huge 38L capacity, with the jet assisted venturi system doubling the air movement from 38L up to 76L • Used for difficult large truck tyres to Ag & earth moving tyres
	Accessories:
5193907	Bead Booster upgrade kit

Bead Blaster - spare parts



112629



112636



112633

Ref. No.	Description
112627	Bead Blaster safety valve, 120 psi
112629	Bead Blaster gauge
112631	Bead Blaster nozzle
112633	Bead Blaster ball valve
112636	Bead Blaster mini inlet valve

TYRE FITTING AND HANDLING

Mounting Tools

Bead breakers



115717



115716



150673



150674



113630



108600



113621



150653

Ref. No.	Description
115717	Bead chisel 15"
115716	Bead chisel 20", protected
150673	Bead breaker, Gaither Bead Vice <ul style="list-style-type: none"> • Bead vice quickly and safely breaks the bead on all new EVA wheels • Comes with lubricant bottle
150674	Bead breaker, Gaither Bead Vice adaptor For use with: <ul style="list-style-type: none"> • Tubeless truck wheels with double humps • Allows the Bead Vice to mount on the open side of the wheel
113630	Bead breaker tyre pliers <ul style="list-style-type: none"> • Mobile, manual bead breaker • Mechanical operation, no electricity or air supply required • Can be used on wheels with single or double hump For use with: <ul style="list-style-type: none"> • ATVs and 4WD off-road vehicles with rims from 12" to 20"
108600	Bead breaker Little Buddy Manual <ul style="list-style-type: none"> • Excellent for working on tyres without removing wheel • Great for all kinds of tyres ATV, golf cart, truck, bus, ag and backhoe tyres • Operates with air ratchet or manual wrench (not included) • Weight 5.5 kg.
113621	Bead breaker slide hammer, HD TR-122
150653	Bead breaker, TL55

TYRE FITTING AND HANDLING

Mounting Tools

Hydraulic bead breaking heads



170232



170237



170229

Ref. No.	Description	Weight	Breaking force
170232	AME 210 truck/tractor head <ul style="list-style-type: none"> Suits all truck rims 2 & 3 piece All tractor & implement wheels Small 3 piece grader wheels 	15.5 kg	11 tons
170234	IMT 210 truck/tractor head <ul style="list-style-type: none"> Suits all truck rims 2 & 3 piece All tractor & implement wheels Small 3 piece grader wheels 	12 kg	10 tons
170932	AME 210 truck/tractor Standard <ul style="list-style-type: none"> Works on single 2-3 piece wheels 	15.5 kg	11 tons
170237	AME 150 push off tool <ul style="list-style-type: none"> Used to push combine & tractor tyres off the rim 	4 kg	4 tons
170229	AME 300 push off tool, tractor <ul style="list-style-type: none"> Used to break the inside bead on dual tractor wheels Minimum width 11.5 cm opens to 30 cm wide 	9 kg	5 tons



170238



170259



170258

Ref. No.	Description	Weight	Breaking force
170238	AME 11060 push off tool <ul style="list-style-type: none"> Can be used to break beads on dual tractor wheels Minimum width 7.5 cm opens to 60 cm wide 	17.6 kg	10 tons
170259	AME 1000 EM head <ul style="list-style-type: none"> To break 3 piece EM rim with a solid back flange Adjustable jaw accomodates large OTR rim flanges Aluminium housing reduces weight by 40% 	14 kg	14 tons
170258	AME Stinger 11090 EM head <ul style="list-style-type: none"> Light weight option for 3 piece EM wheels Mechanically clamps to wheel Unique head pushes on the head not the sidewall Supplied with 2 wedges to prevent the bead reseating 	13 kg	10 tons

TYRE FITTING AND HANDLING
Mounting Tools

Hydraulic bead breaking heads - continued



170227



170231



170269

Ref. No.	Description	Weight	Breaking force
170227	AME 1800 EM head • Breaks beads on 5 piece EM wheels 25" - 51"	14.5 kg	13.8 tons
170269	Bead Breaker 1800 standard head		
170231	IMT 1800 EM head • Breaks beads on 5 piece EM wheels 25" - 51"	13 kg	14 tons

TYRE FITTING AND HANDLING Mounting Tools

Hydraulic bead breaking - Accessories



180221



180223



180228



180229



5191528



108966

Ref. No.	Description
180221	AME hose nipple • Male fitting to fit screw and coupler on bead breaker heads
180223	AME heads coupler • Female coupling with screw on locking ring
180228	IMT head nipple • Male filling lock on as used on IMT hose
180229	IMT coupler • Female coupler lock on as used on IMT hose
180227	Bead breaker, spare hydraulic hose
5191528	Bead breaker "Ritch", spare hose & coupler
108966	Bead breaker, upgrade kit for 3 piece wheels • Converts standard combi style bead breakers to fit 3 piece wheels

Bead breaking hydraulic rams



- Used to break rear beads on 5 piece wheels
- Removable plunger adapter allows the use of a variety of threaded attachments
- A must have for OTR wheel and tyre service.

Ref. No.	Description	Capacity	Stroke	Retracted height
205034	Bead Breaking Ram	10 T	2" (54 mm)	4.75" (121 mm)
205035	Bead Breaking Ram	10 T	4" (105 mm)	6.75" (171.4 mm)
205036	Bead Breaking Ram	10 T	6" (155.7 mm)	9.75" (247.7 mm)
205038	Bead Breaking Ram	10 T	8" (203.2 mm)	11.75" (298 mm)
205040	Bead Breaking Ram	10 T	10" (257.3 mm)	13.75" (349 mm)



205038

TYRE FITTING AND HANDLING

Mounting Tools

Air/Hydraulic pumps

For use with:

- All hydraulic bead breakers, push off rams, bead breaking cylinders and lifting jacks



5191529



5191535



5191530



5191537

Ref. No.	Description
5191529	Bead breaker pump air/hydraulic Ritch <ul style="list-style-type: none"> • Automatic overload valve protects hydraulic components regardless of air pressure • Supplied with a 1.8 metre hydraulic hose
5191535	Bead breaker AME pump 5 litre air/hydraulic <ul style="list-style-type: none"> • Durable metal air motor • Will operate with as little as 80 psi air pressure • Supplied with a 2.4 metre hydraulic hose
5191530	Bead breaker AME pump 8 litre air/hydraulic <ul style="list-style-type: none"> • Turbo break motor permits faster operation • Will operate with as little as 60 psi air pressure
5191537	Bead breaker TITAN air/hydraulic pump, 2.5 litre <ul style="list-style-type: none"> • Compact and lightweight • 10,000 psi hydraulic pressure • Will operate with as little as 80 psi air pressure • Weight 6.4 kg

TYRE FITTING AND HANDLING Mounting Tools & Sealing Rings

Pump rings for trucks



Ref. No.	Description	Size
5193778	Pump ring	22.5"
	Accessories:	
5193857	Pump Ring spare rubber	
5193651	Pump Ring spare clamp	



5193778

Other mounting tools

Ref. No.	Description	Contents
115723	Wheel shield • Protects rims from handling damage	each



115723

Sealing Rings

Earthmover sealing O-rings



- For sealing the tyre beads of graders, earth movers and other heavy OTR vehicles with split rims

Ref. No.	Description	Nominal dia.	Thickness	Contents
115381	OR-020	20"	1/4"	2
115353	OR-021	21"	1/4"	2
115354	OR-024	24"	1/4"	2
115355	OR-025	25"	1/4"	2
115356	OR-232	32"	1/4"	2
115357	OR-325 thick	25"	3/8"	2
115358	OR-329	29"	3/8"	2
115359	OR-333	33"	3/8"	2
115360	OR-335	35"	3/8"	2
115361	OR-339	39"	3/8"	2
115363	OR-345	45"	3/8"	2
115364	OR-349	49"	3/8"	2
115365	OR-351	51"	3/8"	2
115366	OR-463T	63"	1/2"	2
115367	OR-449 thick	49"	1/2"	2
115368	OR-451 thick	51"	1/2"	2
115369	OR-457 thick	57"	1/2"	2



115381



O rings



V rings

TYRE FITTING AND HANDLING

Sealing Rings

O Rings HALTEC

Ref. No.	Description
115390	O Ring EM Seal OR 021 HALTEC
115391	O Ring EM Seal OR 024 HALTEC
115392	O Ring EM Seal OR 025 HALTEC
115393	O Ring EM Seal OR 325 HALTEC
115394	O Ring EM Seal OR 329 HALTEC
115395	O Ring EM Seal OR 333 HALTEC
115396	O Ring EM Seal OR 335 HALTEC
115397	O Ring EM Seal OR 339 HALTEC
115398	O Ring EM Seal OR 345 HALTEC
115399	O Ring EM Seal OR 349 HALTEC
115400	O Ring EM Seal OR 451 HALTEC
115401	O Ring EM Seal OR 457 HALTEC
115417	O Ring EM Seal OR 463T HALTEC
115418	O Ring EM Seal OR 457 OVM HALTEC
115419	O Ring EM Seal OR 463 OVM HALTEC



TYRE FITTING AND HANDLING


Sealing Rings

Wedge sealing rings



• Ensure an improved air seal where the tyre bead meets the rim and flange

• Particularly suitable for radial tyres on split rims



Ref. No.	Description	Nominal dia.	Contents
115382	20 wedge	20"	2
115370	25 wedge	25"	2
115371	24 wedge	24"	2
115372	33 wedge	33"	2
115373	29 wedge	29"	2
115374	35 wedge	35"	2
115375	45 wedge	45"	2
115376	49 wedge	49"	2
115378	39 wedge	39"	2

Bead seat rings



115851



115856

Ref. No.	Description	Nominal dia.	Contents
115851	Bead seat ring, Poly	22.5"	each
115856	Bead seat ring	14 - 15"	each

TYRE FITTING AND HANDLING

Regrooving

Hand Regroovers

Ref. No.	Description
5641200	Rubber Cut 314 Regroover
5641220	Rubber Cut 414 Regroover
5649000	Treadtech T2000 <ul style="list-style-type: none"> • 100% Variable temperature control allows the user to fine tune the temperature setting to achieve optimum cutting results. • Sheet metal housing offers excellent durability, with its powder coated finish providing the best scratch resistance. • With its adjustable blade holder it can accommodate a variety of cutting blade sizes. • Ergonomically designed handle providing the user with the most comfort and control. • Heavy duty cable reduces the risk of causing serious damage to your equipment. • Anti Slip Rubber Feet.



5641200



5649000

Regrooving blades

- Improved cutting performance and long service life
- W Fix = angle blade

Ref. No.	Description	Cutting width	Cutting depth	Contents
5642858	W Fix 1	3 - 4 mm	max. 7 mm	20
5642865	W Fix 2	5 - 6 mm	max. 8 mm	20
5642872	W Fix 3	6 - 8 mm	max. 10 mm	20
5642889	W Fix 4	9 - 10 mm	max. 14 mm	20
5642896	W Fix 5	10 - 14 mm	max. 16 mm	20
5642906	W Fix 6	22 - 28 mm	max. 16 mm	10



5642872

TYRE FITTING AND HANDLING

Regrooving & Tyre Branding

Spare parts for Regroovers

Ref. No.	Description
5640820	RC clamping jaws set
5640128	Rubber Cut RC414 Turn Switch
5640580	Rubber Cut RC414/314 transformer 230V & base plate



5640820



5640128

Tyre Branding

Branding Irons

- Special characters such as &, %, etc. available upon request

Ref. No.	Description	Size L x W	Electric power/ connection	Type size
5190977	Branding iron, 1/2"	70 x 35 mm	230/300 V/W	12 mm
103380	Branding iron, 1" Elrick N o32 230v			
1033840	Branding 1" Number 0			
1033841	Branding 1" Number 1			
1033842	Branding 1" Number 2			
1033843	Branding 1" Number 3			
1033844	Branding 1" Number 4			
1033845	Branding 1" Number 5			
1033846	Branding 1" Number 6			
1033847	Branding 1" Number 7			
1033848	Branding 1" Number 8			
1033849	Branding 1" Number 9			
103384A	Branding 1" Letter A			
103384B	Branding 1" Letter B			
103384C	Branding 1" Letter C			
103384D	Branding 1" Letter D			
103384E	Branding 1" Letter E			
103384F	Branding 1" Letter F			
103384G	Branding 1" Letter G			
103384H	Branding 1" Letter H			
103384I	Branding 1" Letter I			



5190977



103380



103384/0-9

TYRE FITTING AND HANDLING

Tyre Branding

Branding Irons - continued

Ref. No.	Description	Size L x W	Electric power/ connection	Type size
103384J	Branding 1" Letter J			
103384K	Branding 1" Letter K			
103384L	Branding 1" Letter L			
103384M	Branding 1" Letter M			
103384N	Branding 1" Letter N			
103384O	Branding 1" Letter O			
103384P	Branding 1" Letter P			
103384Q	Branding 1" Letter Q			
103384R	Branding 1" Letter R			
103384S	Branding 1" Letter S			
103384T	Branding 1" Letter T			
103384U	Branding 1" Letter U			
103384V	Branding 1" Letter V			
103384W	Branding 1" Letter W			
103384X	Branding 1" Letter X			
103384Y	Branding 1" Letter Y			
103384Z	Branding 1" Letter Z			
5587195	Branding 1/2" Letter A			
5587205	Branding 1/2" Letter B			
5587212	Branding 1/2" Letter C			
5587229	Branding 1/2" Letter D			
5587236	Branding 1/2" Letter E			
5587243	Branding 1/2" Letter F			
5587250	Branding 1/2" Letter G			
5587267	Branding 1/2" Letter H			
5587274	Branding 1/2" Letter I			
5587281	Branding 1/2" Letter J			
5587298	Branding 1/2" Letter K			
5587315	Branding 1/2" Letter L			
5587322	Branding 1/2" Letter M			
5587339	Branding 1/2" Letter N			
5587346	Branding 1/2" Letter O			
5587353	Branding 1/2" Letter P			
5587322	Branding 1/2" Letter M			

TYRE FITTING AND HANDLING

Tyre Branding

Branding Irons - continued

Ref. No.	Description	Size L x W	Electric power/ connection	Type size
5587339	Branding 1/2" Letter N			
5587346	Branding 1/2" Letter O			
5587353	Branding 1/2" Letter P			
5587360	Branding 1/2" Letter Q			
5587377	Branding 1/2" Letter R			
5587384	Branding 1/2" Letter S			
5587391	Branding 1/2" Letter T			
5587401	Branding 1/2" Letter U			
5587418	Branding 1/2" Letter V			
5587425	Branding 1/2" Letter W			
5587432	Branding 1/2" Letter X			
5587449	Branding 1/2" Letter Y			
5587456	Branding 1/2" Letter Z			
5587463	Branding 1/2" Number 1			
5587470	Branding 1/2" Number 2			
5587487	Branding 1/2" Number 3			
5587494	Branding 1/2" Number 4			
5587504	Branding 1/2" Number 5			
5587511	Branding 1/2" Number 6			
5587528	Branding 1/2" Number 7			
5587535	Branding 1/2" Number 8			
5587542	Branding 1/2" Number 9			
5587559	Branding 1/2" Number 0			

Tyre branding - spare parts

Ref. No.	Description
103382	Branding iron, 1" spare element 230v
103381	Branding iron, 1" spare clamp kit

TYRE FITTING AND HANDLING

Wheel Braces

Wheel braces, car



123560



124088



180205



180245

Ref. No.	Description	Size
123560	Wheel brace, foldable	17 x 19 x 21 x 23
124088	Wheel brace, heavy duty	17 x 19 x 21 x 1/2 sq
180205	Wheel brace, car WBC 36	17 x 19 x 21 x 13/16
180245	Wheel brace, car/4WD	17 x 19 x 21 x 22

Wheel braces, truck



124072



170242



124100

Ref. No.	Description	Size
124072	Wheel brace complete with bar	1-5/16 x 1-1/4
170242	Wheel brace complete with bar	41 mm x 21 mm
124100	Wheel brace bar	36" x 3/4"

TYRE FITTING AND HANDLING

Standard Sockets & Impact Sockets

Chrome sockets 3/4" drive

- Suitable for use with hand tools only
- 6 + 12 point hexagonal
- Chrome-vanadium steel

Ref. No.	Description	Drive	Size
129059	Chrome socket	3/4 "	1-1/4 "
129159	Chrome socket long	3/4 "	1-1/4 "
129160	Chrome socket long	3/4 "	1-5/16 "
129080	Chrome socket long	3/4 "	32 mm
129145	Chrome socket long	3/4 "	33 mm



2

Impact Sockets

Impact sockets 1/2" drive, standard

Ref. No.	Description	Drive	Size
115038	Impact socket	1/2 "	15/16 "
115040	Impact socket	1/2 "	1 "
115054	Impact socket	1/2 "	17 mm
115055	Impact socket	1/2 "	19 mm
115058	Impact socket	1/2 "	22 mm
115050	Impact socket	1/2 "	23 mm
115043	Impact socket	1/2 "	24 mm



Impact sockets 1/2" drive, long

Ref. No.	Description	Drive	Size
115041	Impact socket, long	1/2 "	7/8 "
115053	Impact socket, long	1/2 "	15 mm
115066	Impact socket, long	1/2 "	17 mm
115070	Impact socket, long	1/2 "	19 mm
115061	Impact socket, long	1/2 "	21 mm
115072	Impact socket, long	1/2 "	22 mm
115065	Impact socket, long	1/2 "	24 mm
115056	Impact socket, long	1/2 "	25 mm
115074	Impact socket, long	1/2 "	23 mm



TYRE FITTING AND HANDLING

Impact Sockets

Impact sockets 1/2" drive, plastic-covered

- Suitable for use with impact wrench
- Completely encapsulated in plastic
- Plastic cover can be removed
- Extra thin walls
- Colour coded
- Rims protected from marking

Ref. No.	Description
115207	Impact socket 'Protecta' • Four piece set includes: • 1 Socket size 17 mm • 1 Socket size 19 mm • 1 Socket size 21 mm • 1 Socket size 22 mm
115197	Impact socket 'Protecta', 17 mm
115198	Impact socket 'Protecta', 19 mm
115199	Impact socket 'Protecta', 21 mm
115208	Impact socket 'Protecta', 22 mm



115207

Impact sockets 1/2" drive, flip

- Suitable for use with impact wrench
- Must be at least 2" extended anvil
- 6 point hexagonal
- Chrome-molybdenum steel
- Burnished surface

Ref. No.	Description	Drive	Size
115039	Impact socket, flip, thin wall	1/2 "	19x21 mm
115042	Impact socket, flip	1/2 "	19x21 mm
115046	Impact socket, flip	1/2 "	21x22 mm



Impact sockets 3/4" drive, standard

- Suitable for use with impact wrench
- 6 point hexagonal
- Chrome-molybdenum steel
- Burnished surface

Ref. No.	Description	Drive	Size
115141	Impact socket	3/4 "	15/16 "
115145	Impact socket	3/4 "	1-1/8 "
115146	Impact socket	3/4 "	1-3/16 "
115148	Impact socket	3/4 "	1-5/16 "
115152	Impact socket	3/4 "	1-1/2 "
115158	Impact socket	3/4 "	17 mm
115156	Impact socket	3/4 "	23 mm
115164	Impact socket	3/4 "	32 mm



TYRE FITTING AND HANDLING

Impact Sockets

Impact sockets 3/4" drive, standard - continued

Ref. No.	Description	Drive	Size
115166	Impact socket	3/4 "	33 mm
115165	Impact socket	3/4 "	35 mm
115167	Impact socket	3/4 "	38 mm
115169	Impact socket	3/4 "	41 mm

Impact sockets 3/4" drive, long

- Suitable for use with impact wrench
- 6 point hexagonal
- Chrome-molybdenum steel
- Burnished surface

Ref. No.	Description	Drive	Size
115171	Impact socket, long	3/4 "	23 mm
115205	Impact socket, long	3/4 "	25 mm
115243	Impact socket, long	3/4 "	26 mm
115245	Impact socket, long	3/4 "	28 mm
115184	Impact socket, long	3/4 "	31 mm
115269	Impact socket, long heavy duty	3/4 "	31 mm
115272	Impact socket, long heavy duty	3/4 "	33 mm
115248	Impact socket, long	3/4 "	33 mm
115202	Impact socket, long	3/4 "	49 mm
115246	Impact socket, long	3/4 "	30 mm
115252	Impact socket, long	3/4 "	38 mm
115188	Impact socket, long	3/4 "	47 mm
115187	Impact socket, long	3/4 "	34 mm
115153	Impact socket, long	3/4 "	21 mm
115255	Impact socket, long	3/4 "	22 mm
115186	Impact socket, long	3/4 "	23 mm
115257	Impact socket, long	3/4 "	24 mm
115161	Impact socket, long	3/4 "	27 mm
115203	Impact socket, long	3/4 "	28 mm
115182	Impact socket, long	3/4 "	30 mm
115183	Impact socket, long	3/4 "	32 mm
115264	Impact socket, long	3/4 "	33 mm
115185	Impact socket, long	3/4 "	35 mm
115266	Impact socket, long	3/4 "	36 mm
115170	Impact socket, long	3/4 "	38 mm



TYRE FITTING AND HANDLING

Impact Sockets

Impact sockets 3/4" drive, long - continued

Ref. No.	Description	Drive	Size
115168	Impact socket, long	3/4 "	41 mm
115076	Impact socket, long heavy duty	3/4 "	21 mm
115052	Impact socket, long heavy duty	3/4 "	29 mm
115253	Impact socket, long heavy duty	3/4 "	32 mm
115271	Impact socket, long heavy duty	3/4 "	33 mm

Impact sockets 3/4" drive, square

- Suitable for use with impact wrench
- 4 point square
- Chrome-molybdenum steel
- Surface burnished

Ref. No.	Description	Drive	Size
115067	Impact socket, square	3/4 "	17 mm
115069	Impact socket, square	3/4 "	19 mm
115063	Impact socket, square	3/4 "	20 mm
115068	Impact socket, square	3/4 "	21 mm
115071	Impact socket, square long	3/4 "	17 mm
115075	Impact socket, square long	3/4 "	19 mm
115073	Impact socket, square long	3/4 "	21 mm



Impact sockets 3/4" drive, combined sockets

- Suitable for use with impact wrench
- 6 point hexagonal
- Chrome-molybdenum steel
- Burnished surface

Ref. No.	Description	Drive	Size
115111	Impact socket, square heavy duty	3/4 "	35 x 17 mm
115110	Impact socket, square heavy duty	3/4 "	41 x 21 mm



TYRE FITTING AND HANDLING

Impact Sockets

Impact sockets 1" drive, standard

- Suitable for use with impact wrench
- 6 point hexagonal
- Chrome-molybdenum steel
- Surface burnished

Ref. No.	Description	Drive	Size
115117	Impact socket	1"	1-5/16 "
115189	Impact socket	1"	1-3/8 "
115180	Impact socket	1"	1-3/4 "
115289	Impact socket	1"	41 mm
115281	Impact socket	1"	46 mm



2

Impact sockets 1" drive, long

Ref. No.	Description	Drive	Size
115282	Impact socket long	1"	1-1/4 "
115284	Impact socket long	1"	1-5/16 "
115174	Impact socket long	1"	1-5/8 "
115209	Impact socket long	1"	1-3/4 "
115286	Impact socket long	1"	30 mm
115287	Impact socket long	1"	32 mm
115280	Impact socket long	1"	33 mm
115288	Impact socket long	1"	41 mm



Socket extensions

Ref. No.	Description	Drive	Length
115126	Socket extension	3/4 "	250 mm
115127	Socket extension	3/4 "	330 mm
119584	Socket extension bar	3/4 "	4 "
119585	Socket extension bar	3/4 "	8 "
119586	Socket extension bar	3/4 "	16 "



115126

119585

TYRE FITTING AND HANDLING

Impact Sockets

Impact socket sets



115135



115214

Ref. No.	Description	Drive
115133	Impact socket, 10 piece metric	1/2 "
115135	Impact socket, 10 piece long metric	1/2 "
115215	Impact socket, 11 piece CP long metric	3/4 "
115172	Impact socket, 8 piece CP long metric	3/4 "
115214	Impact socket, 14 piece CP long metric	1/2 "
115220	Impact socket, 8 piece long metric	1 "

Socket Accessories



119587



119510



115293



115179

Ref. No.	Description	Drive	Contents
119587	Socket, sliding T bar	3/4 "	each
119510	Socket, wheel nut lock buster	1/2 "	kit
115293	Torque multiplier		each
115175	Impact socket adaptor	3/4" Female to 1/2" Male	each
115179	Impact socket adaptor	1" Female to 3/4" Male	each
115030	Impact socket adaptor hex 12 mm	1/2 "	each

TYRE FITTING AND HANDLING

Torque Sockets

Torque limiting extensions, 1/2" drive

- Suitable for use with impact wrenches
- Preset torque limit
- Any 1/2 drive impact socket can be used
- Over tightening of wheel bolts and nuts is practically impossible
- Preset torque limit
- Impact wrenches can be used on full power to tighten nuts

Ref. No.	Description
180902	Torque socket extension, 7 piece set premium includes: • Torque sockets B,D,DD,F,G,H,I
180923	Torque socket extension 65ft / lb (Green)
180922	Torque socket extension 80ft / lb (Yellow)
180921	Torque socket extension 100ft / lb (Blue)
180925	Torque socket extension 110ft / lb (Orange)
180924	Torque socket extension 130ft / lb (Brown)
180920	Torque socket extension 3 piece set includes: • 1 Torque extension 80ft / lb • 1 Torque extension 65ft / lb • 1 Torque extension 100ft / lb



180902



180923



180921

Torque limiting sockets, 1/2" drive

- Suitable for use with impact wrenches
- Preset torque limit
- Over tightening of wheel bolts and nuts is practically impossible
- Impact wrenches can be used on full power to tighten nuts

Ref. No.	Description	Size	Torque Limit
180905	Torque socket A	13 / 16 "	100 ft / lb
180907	Torque socket B	21 mm	80 ft / lb
180910	Torque socket D	21 mm	60 ft / lb
180912	Torque socket E	19 mm	80 ft / lb
180900	Torque socket, 5 piece set premium includes: • Torque socket A 13/16 " 100ft / lb • Torque socket B 21 mm 80ft / lb • Torque socket D 21 mm 60ft / lb • Torque socket F 19 mm 65ft / lb • Torque socket E 19 mm 80ft / lb		



180900

TYRE FITTING AND HANDLING

Wheel Lock Keys

Wheel Lock Keys

- Wheel Lock Master Key sets
- Removes all 2nd generation 2012-present factory wheel lugnut locks
- Identical to factory set - uses same factory part numbers
- Cannot be used with impact wrenches



119560



119562



119564



119566



119568



119570



119572

Ref. No.	Description
119560	BMW 21PC
119562	VW 23PC
119564	BMW 20PC
119566	VW 20PC
119568	AUDI 22PC
119570	PORSCHE 20PC
119572	MERCEDES 12PC

TYRE FITTING AND HANDLING

Gauges

Tread depth gauges



103450



103335



103336



103339

Ref. No.	Description	Depth	Weight
103450	Tread depth gauge, OTR/EM HALTEC	0 - 150 mm	410 g
103335	Tread depth gauge, 190M passenger/truck	0 - 26 mm	70 g
103336	Tread depth gauge, 1420H passenger/truck	0 - 150 mm	36 g
103339	Digital tread depth gauge (Aussie)	0 - 25 mm	100 g

Tyre pressure gauges



103305



108312



109447



109608

Ref. No.	Description	Measuring range						
103305	Pressure gauge, display pack 24	10-50 psi	•	•				
108312	Pressure gauge, complete with case	3-60 psi	•	•				
109447	Pressure gauge, 540 complete with case	3-60 psi	•	•				
109608	Pressure gauge, HT-105	10-50 psi	•					

TYRE FITTING AND HANDLING

Gauges

Tyre pressure gauges - continued



103309



103312



103314



103316



103317



103318



103320






5709996



103315



5199353

Ref. No.	Description	Measuring range						
103309	Pressure gauge, H.D. with angled head	10-150 psi						•
103312	Pressure gauge, H.D. short	10-145 psi				•	•	
103314	Pressure gauge, G120 pencil HALTEC	20-120 psi				•	•	
103316	Pressure gauge, G210 dual foot pencil	20-120 psi				•	•	
103317	Pressure gauge, GA 255 dual straight short pencil HALTEC	20-120 psi				•	•	
103318	Pressure gauge, G255 dual straight long HALTEC	20-120 psi				•	•	
103320	Pressure gauge, G220 dual straight pencil	20-120 psi				•	•	
103247	Pressure gauge, GA-289 HALTEC	0-16 psi				•	•	•
5199354	Pressure gauge, Wonder 1900	10-170 psi		•	•	•		
5709996	Pressure gauge, Wonder 1950	10-170 psi				•	•	
103315	Pressure gauge, G160, air/liquid	5-45 psi						•
	Accessories:							•
5199353	Pressure gauge, 1951 spare hose (for 1950 gauge)							•

TYRE FITTING AND HANDLING

Gauges

Tyre pressure gauges - continued









103324



5199355



5199357

Ref. No.	Description	Measuring range						
103242	Pressure Geuge GA255 EM Swirel HALTEC	10-150 psi						
103324	Pressure gauge, 420 EM straight	20-120 psi						
5199355	Pressure gauge, 1930 Wonder EM/truck	10-170 psi						
5199357	Pressure gauge, 1940 Wonder EM	10-175 psi						
Accessories:								
5199352	Pressure gauge, 1931 spare hose (for 1930 gauge)							
5199359	Pressure gauge, 1941 spare hose (for 1940 gauge)							

Screw in dial pressure gauges



108335



108336



108337



108339



108340

Ref. No.	Description	Measuring range
108335	Screw in pressure gauge, bottom entry 63 mm liquid filled	145 psi
108336	Screw in pressure gauge, rear entry 50 mm	145 psi
108337	Screw in pressure gauge, bottom entry 63 mm liquid filled	230 psi
108339	Screw in pressure gauge, bottom entry 50 mm	145 psi
108340	Screw in pressure gauge, rear entry 63 mm liquid filled	145 psi

TYRE FITTING AND HANDLING

Gauges & Marker Pens, Sticks, Ink and Applicators

Other gauges

Ref. No.	Description	Measuring range
5958528	Durometer hardness tester <ul style="list-style-type: none"> • Used for testing the hardness of plastics and rubber in Shore A (soft rubber, elastomers, natural rubber, or soft PVC) • Fast and simple measurement • Easy to read antiglare scale • A handy carrying case protects the meter against dust and damage 	0 - 100



Marker Pens, Sticks, Ink and Applicators

- For labelling rubber items or marking fields of repair patches



Ref. No.	Description	Contents
5950045	Rubber marking pen, silver	each
115961	Marker Markall B, yellow	12
115962	Marker Markall B, red	12
115963	Marker Markall B, white	12
115966	Marker Markall B, blue	12
115968	Marker Markall B, orange	12
115964	Marker Speedy, white	12
115974	Marker Speedy, yellow	12
115971	Marker ink, white	1 litre
115973	Marker ink, yellow	1 litre
115976	Ball marker bottle, BM-5	each
170501	Marker Uni paint, white	each
170510	Marker Uni paint, silver	each

TYRE FITTING AND HANDLING

Safety and PPE

Working gloves



115866



115870



115873



115875



115881



115884

Ref. No.	Description	Colour	Size	Contents
115866	Working gloves, Retreader • Chromed split leather	Cream	L	1 pair
115870	Working glove, Mechanic • Spandex, Leather	Blue/Grey	L	1 pair
115877	Working gloves, Mechanic • Spandex / Leather	Blue/Grey	XL	1 pair
115873	Working gloves, Riggers • Split cowhide	Mustard	L	1 pair
115875	Working gloves, Carlo • Canvas / Split cowhide • Pre-care retreading	Yellow/ Grey	L	1 pair
115881	Protection gloves, Nitrile • Trade quality tough • 100% nitrile • Latex and powder free • Textured finger tips • High puncture and chemical resistant • Low sweat	Black	M	100
115880	Protection gloves, Nitrile	Black	L	100
115882	Protection gloves, Nitrile	Black	XL	100
115884	Working gloves, Tyre Buddy • EVA foam padded palm • High abrasion resistant palm • Rubberised zesa clarino fingers	Black	L	1 pair

TYRE FITTING AND HANDLING

Safety and PPE

Working gloves - continued



115886



115887



115864

Ref. No.	Description	Colour	Size	Contents
115886	Working gloves, Tyre Buddy <ul style="list-style-type: none"> EVA foam padded palm High abrasion resistant palm Ruberized zesa clarino fingers 	Black	XL	1 pair
115887	Working gloves, M-pact <ul style="list-style-type: none"> A glove that absorbs punishment so your hands don't Sonic welded rubber top EVA foam palm pads Tapered fingers stretch side panels and a spandex panel at the thumbs 	Grey/Black	M	1 pair
115888	Working gloves, M-pact	Grey/Black	L	1 pair
115885	Working gloves, M-pact	Grey/Black	XL	1 pair
115864	Ninja gloves <ul style="list-style-type: none"> 15-gauge fashion grade nylon shell for increase comfort Durable, flexible coating that repels liquids to provide a firm grip Treated with actifresh to kill bacteria and promote freshness 	Black	L	1 pair

Safety glasses

- Fully adjustable for height and temple length to guarantee a perfect fit
- Flexible, lightweight frame consists of a two-shot material and relieves all pressure points
- Feels like it is made-to-order and fits both men and women
- Cushioned temples also provide excellent non-slip function
- All lenses scratch-resistant



116110

Ref. No.	Description
116110	Safety glasses, clear
116112	Safety glasses, fusion-smoke <ul style="list-style-type: none"> Tinted lens for outdoor use



116112

TYRE FITTING AND HANDLING

Safety and PPE

Ear protection

- Noise in the workplace always has a performance-reducing effect, increases the frequency of mistakes and the risk of accidents, and is harmful to health owing to its damaging effect on hearing

Ref. No.	Description
116115	Ear muffs <ul style="list-style-type: none"> • Robust basic model • With universal fitting headband • High level of comfort • Lightweight • Excellent sound insulation (SNR = 30 dB/L = 20/M = 28/H = 35) • Weight 175g
116119	Ear plugs <ul style="list-style-type: none"> • Each pair packed separately • Box of 200
116130	Ear Plugs Coded <ul style="list-style-type: none"> • Meets Australian standards • Rated as class 5 (for use under 110 dB)



116115



116119



116130

Seat covers

Ref. No.	Description
116150	Safety slip and grip seat covers <ul style="list-style-type: none"> • Provides protection for car seats in the work shop environment • Simply slip over and the cover stays in place • Avoids nasty marks on interiors of customer cars



116150

Face mask

- Avoid facial impact from chemical splash and other objects

Ref. No.	Description
116120	Face mask
	Accessories:
116114	Face mask spare visor



116120



116114

TYRE FITTING AND HANDLING

Mounting/demounting compunds

Mounting/Demounting

- REMA TIP TOP offers mounting pastes, waxes and creams for mounting all types and sizes of tyres
- These mounting lubricants are developed in our own laboratories and extensively tested in the field
- Specifically designed for the respective tyre fitting applications and conditions
- Developed to cater for different tools, equipment and tyre/rim assemblies, thus avoiding costly damage during the mounting process



170480

UNIVERSAL PASTE



- Approved by MERCEDES-BENZ (trucks) and PORSCHE
- For fast, gentle and easy fitting and demounting of all standard tyre/rim combinations
- Non-spattering
- Chemically neutral with respect to rubber and metal
- Excellent lubrication for mounting and demounting operations
- Promotes adhesion between rim and tyre.
- Prevents tyre slippage



5930625

Ref. No.	Description	Contents
5930591	Mounting paste	1 kg
170480	Mounting paste POWERMOUNT	5 kg
5930625	Mounting paste REMAXX	10 kg
5141633	Mounting wax REMAXX	5 kg



5141633

WAX



- Can be used in all standard mounting applications.
- For use when mounting car and motorcycle tyres
- Becomes transparent when dry

Ref. No.	Description	Contents
5930553	Mounting WAX	5 kg
170470	Powermount WAX	5 kg



5930553

WAX 2000



- Can be used in all standard mounting applications.
- For use when mounting car and truck tyres

Ref. No.	Description	Contents
5931851	Mounting wax MONT 2000	5 kg
5931875	Mounting wax MONT 2000	10 kg



5931851

TYRE FITTING AND HANDLING

Mounting/demounting compunds

CREAM



5930516



5930508



5930539

Ref. No.	Description	Contents						
5930516	<p>Mounting cream TRUCK</p> <ul style="list-style-type: none"> Developed for long sliding distances with high friction between tyres and rims, extreme mounting conditions New, effective sliding coat Assists in the mounting / de-mounting process, reducing strain on the operator as well as equipment Chemically neutral to rubber, steel and aluminium Economic usage <p>Caution:</p> <ul style="list-style-type: none"> Due to the high sliding effect not to be used for car or motorcycle tyres, tractor driving wheels, industrial or EM tyres. 	5 kg						
5930508	<p>Mounting CREAM-W</p> <ul style="list-style-type: none"> Higher viscosity combining the properties of a paste and a cream 	5 kg						
5930539	<p>Mounting CREAM-W-EM</p> <ul style="list-style-type: none"> Mounting cream for large EM tyres Cream-type viscosity allows quick application to large areas Good mounting/demounting properties 	5 kg						

TYRE COMPOUND

Can be used as a flexible pump ring for all tyre mounting operations

Stiff paste with stable viscosity to seal the gap between tyre bead and rim edge

Commonly referred to as Murphys Mounting Compound



Ref. No.	Description	Contents
180500	TYRE COMPOUND	11.5 kg



180500

TYRE FITTING AND HANDLING

Mounting/demounting compunds

Demounting fluid

Ref. No.	Description	Content
180708	Super Slick'em	4 litre



180708

Mounting lubricants



180600



180703



180715



180750

Ref. No.	Description	Contents
180600	Mounting lubricant, Gel	20 litre
180703	Mounting lubricant, 579	25 litre
180715	Mounting lubricant, Airlock	4 litre
180727	Mounting lubricant, Tyre Slick	25 litre
180750	Mounting lubricant, Slip Tac concentrate	20 litre

Tyre shine

- Can be sprayed or wiped onto tyres to give all tyres on the vehicle a "new shiny" look

Ref. No.	Description	Colour	Contents
170416	Tyre shine Super <ul style="list-style-type: none"> • Superior shine life • silicon shine • solvent based • not sold in W.A. 	clear	20 litre plastic drum
170417	Tyre shine West (W.A. only) <ul style="list-style-type: none"> • Water Based 	clear	20 litre plastic drum
170418	Tyre shine <ul style="list-style-type: none"> • Economy • Water based • Non solved for improved workshop safety 	clear	20 litre plastic drum



170418

TYRE FITTING AND HANDLING

Chemical Products

Lubricators

WD40

Known as ‘the can with a thousand uses’, WD40 protects metal from rust and corrosion, unfreezes seized parts, displaces moisture, and lubricates just

about anything. WD40 is also great when it comes to cleaning grease, grime, and other marks from most surfaces.



Ref. No.	Description	Contents
170201	WD40	4 litre
170202	WD40 including applicator bottle	4 litre

170202

Anti-seize compound

Ref. No.	Description	Contents
115725	Neva-lok anti-seize compound <ul style="list-style-type: none"> • High temperature-copper • Anti-seize and anti-corrosion • Permits firmer tightening and easier opening 	500 g



115725

BEAD SEALER

- Spreadable sealant for sealing leaks caused by ageing or wear on the beads
- Applied to the bead and bead seat before the tyre is inflated
- During inflation the solid matter contained in the solution is pressed into the uneven areas and seals them

Safety instruction:

- As BEAD SEALER is flammable, do not use it to fill the tyre
- Also do not use it to seal larger bead injuries caused during tyre mounting, cuts extending to the fabric etc.
- Not a replacement for inner liner sealer



170130

Ref. No.	Description	Contents
170130	BEAD SEALER	1 litre

PENETRATING COMPOUND

Ref. No.	Description	Contents
170330	Skod penetrating compound <ul style="list-style-type: none"> • Liquid penetrates immediately for removal of stubborn tyres or rusty bolts. 	1 litre



170330

TYRE FITTING AND HANDLING

Spray Bottles & Hand Cleaner

- For even distribution of liquids on surfaces



160990



170204



170000



5709440

Ref. No.	Description	Contents
160990	Spray Bottle Pump Up Aussie • Can hold a label if a customer wishes to apply one	1000 ml
170204	WD40 Spray bottle • Handy trigger operated bottle for easy application of WD-40 and other liquids. • Can be used with solvents	500 ml
170000	Spray bottle trigger • Can be used with solvents	1000 ml
5709440	Pump spray bottle • Easy to use spray bottle, just pump up the bottle an press the trigger to release a fine mist. • Can be used with solvents.	1000 ml

Hand Cleaner

Hand Cleaner Super

- Removes even the toughest dirt such as soot, paint, printing ink, tar, bitumen, underseal etc.
- Orange fragrance
- Hand Cleaner SUPER cleans down to the pores, is easy to rinse off, does not contain sand and therefore will not clog drains or outlets



5930443



5930412

Ref. No.	Description	Contents
5930443	Hand Cleaner SUPER	11 litre bucket
5930436	Hand Cleaner SUPER	120 litre barrel
5930412	Hand cleaner dispenser STANDARD, universal For use with: • Hand Cleaner SUPER	

TYRE FITTING AND HANDLING Hand Cleaner

Hand Cleaner TOP CLEAN

- Efficient, cream formula hand cleaner which does not attack the skin
- Removes toughest soiling such as oil, grease, tar, resin, paint etc.
- Cleans with mild ingredients and very fine abrasive materials with no organic solvents
- Contains no sand and therefore does not clog outlets or drains
- Over 90 % of the ingredients are biodegradable



5932001

Ref. No.	Description	Contents
5932150	Hand Cleaner TOP CLEAN	250 ml tube

SOLVOL

- Efficient pumice based scrubbing power
- Powerful cleaning agents, do not harm the skin
- Removes the toughest soiling with natural citrus oils
- Leaves hands with a pleasant unobtrusive smell
- Available in either bar or liquid form



5050890

Ref. No.	Description	Units	Contents
5050890	SOLVOL BAR	2 pack	2 x 100 g
5050892	SOLVOL BAR	24 pack	24 x 100 g
5050894	SOLVOL LIQUID	pump pack	4.5 litre



5050892



5050894

Paper towel & RecyPack

Ref. No.	Description	Contents
5930150	Hand Paper Towel	
180400	RecyPack Spill Kit Includes: <ul style="list-style-type: none"> • 25L absorbent refill (180410) • Waste separating rocking-sieve 	<ul style="list-style-type: none"> • Waste collection shovel • Dispersment hand shovel • Sturdy broom • Clean up spills and reduce waste with this environmentally friendly spill kit.
180410	Spil Kit Absorbent (RecyPack) <ul style="list-style-type: none"> • Instant and complete absorption of liquid spills • Safe and completely dry floors, even after oil spill • 8 times more absorbing than traditional products • Cotton-fibre based absorbent • Reusable (cat-litter principle) 	25 L



180400

180410

TYRE FITTING AND HANDLING Brushes

• Flat brushes are especially suitable for mounting low profile tyres.

• Brushes with round head are excellent for application of mounting cream



180320



5956032



5930618



170505



5958308



9958308



9958310



9958315

Ref. No.	Description	Width	Length
180320	Flat brush	50 mm	200 mm
5956032	Flat brush	100 mm	200 mm
5930618	Special brush truck, short		300 mm
170505	Bead mop		450 mm
5958308	Application brush		230 mm
9958308	Lubricating brush, small		230 mm
9958310	Lubricating brush, medium		250 mm
9958315	Lubricating brush, large		270 mm

TYRE FITTING AND HANDLING

Wheel Nut Precision, Retention and Indication

CHECKPOINT®

- The CHECKPOINT® indicator is fitted on the wheel nut when a wheel nut comes loose, the direction of the indicator changes visibly
- CHECKPOINT® makes it possible to correctly check vehicles for loose wheel nuts during the daily inspection
- Further sizes available on request



Ref. No.	Description	Size	Colour	Contents
115898	CHECKPOINT®	17 mm	yellow	100
115899	CHECKPOINT®	19 mm	yellow	100
115896	CHECKPOINT®	20 mm	yellow	100
115906	CHECKPOINT®	21 mm	yellow	100
115905	CHECKPOINT®	22 mm	yellow	100
115894	CHECKPOINT®	23 mm	yellow	100
115911	CHECKPOINT®	24 mm	yellow	100
115931	CHECKPOINT®	25 mm	yellow	100
115913	CHECKPOINT®	27 mm	yellow	100
115916	CHECKPOINT®	28 mm	yellow	100
115930	CHECKPOINT®	29 mm	yellow	100
115901	CHECKPOINT®	30 mm	yellow	100
115902	CHECKPOINT®	31 mm	yellow	100
115903	CHECKPOINT®	32 mm	yellow	100
115900	CHECKPOINT®	33 mm	yellow	100
115909	CHECKPOINT®	34 mm	yellow	100
115920	CHECKPOINT®	35 mm	yellow	100
115908	CHECKPOINT®	36 mm	yellow	100
115907	CHECKPOINT®	38 mm	yellow	100
115922	CHECKPOINT®	40 mm	yellow	100
115904	CHECKPOINT®	41 mm	yellow	100
115924	CHECKPOINT®	44 mm	yellow	100

TYRE FITTING AND HANDLING

Wheel Nut Precision, Retention and Indication

CHECKPOINT® -Continued

Ref. No.	Description	Size	Colour	Contents
115917	CHECKPOINT®	46 mm	yellow	100
115953	CHECKPOINT®	50 mm	yellow	100
115943	CHECKPOINT®	21 mm	red	100
115944	CHECKPOINT®	22 mm	red	100
115945	CHECKPOINT®	24 mm	red	100
115946	CHECKPOINT®	25 mm	red	100
115947	CHECKPOINT®	27 mm	red	100
115948	CHECKPOINT®	30 mm	red	100
115952	CHECKPOINT®	31 mm	red	100
115934	CHECKPOINT®	32 mm	red	100
115935	CHECKPOINT®	33 mm	red	100
115949	CHECKPOINT®	36 mm	red	100
115936	CHECKPOINT®	41 mm	red	100



CHECKPOINT® Accessories

Ref. No.	Description
115883	CHECKPOINT® applicator • 31,32 and 33 mm only



115883

CHECKLINK®

- CHECKLINK® links wheel nuts and prevents loose wheel nuts from being projected away from the wheel bolt
- However, the tightening torques always has to be checked regularly
- Further sizes available on request

Ref. No.	Description	Size	Colour	Contents
115923	CHECKLINK®	22 mm	yellow	50
115925	CHECKLINK®	30 mm	yellow	50
115926	CHECKLINK®	32 mm	yellow	50
115927	CHECKLINK®	33 mm	yellow	50




TYRE FITTING AND HANDLING

Wheel Nut Precision, Retention and Indication

DUSTITE®

- DUSTITE® is a combination of a dust cap and a loose wheel nut indicator
- DUSTITE® will cover a wheel nut with a short stud effectively keeping the wheel nut and stud threads clean

Ref. No.	Description	Size	Colour	Contents
115890	DUSTITE®	21 mm	yellow	each
115874	DUSTITE®	32 mm	yellow	each
115941	DUSTITE®	33 mm	yellow	each
115876	DUSTITE®	32 mm	black	each
115893	DUSTITE®	33 mm	black	each



115889
115891
115892

DUSTITE® long reach

- DUSTITE® long reach is a combination of a dust cap and loose wheel nut indicator
- DUSTITE® long reach will cover a wheel nut with a long stud effectively keeping the wheel nut and stud threads clean
- DUSTITE® long reach is an effective tool to visually detect loose wheel nuts where wheel trims with wheel nut access holes have been fitted

Ref. No.	Description	Size	Colour	Contents
115889	DUSTITE® long reach	19 mm	yellow	each
115891	DUSTITE® long reach	21 mm	yellow	each
115892	DUSTITE® long reach	22 mm	yellow	each
115940	DUSTITE® long reach	30 mm	yellow	each
115897	DUSTITE® long reach	32 mm	yellow	each
115895	DUSTITE® long reach	33 mm	yellow	each
115915	DUSTITE® long reach	33 mm	black	each



115897
115895

TYRE FITTING AND HANDLING

Wheel Nut Precision, Retention and Indication

CHECKTAG®

- CHECKTAG® will locate on a wheel nut, a sticker can be applied with instructions for the driver/tyre fitter
- The pointer will indicate if the wheel nut moves



115932



115918

Ref. No.	Description	Size	Colour	Contents
115932	CHECKTAG	32 mm	red	100
115933	CHECKTAG	33 mm	red	100
115919	CHECKTAG® sticker "Check nuts" • Checktag® sticker "Check nuts" just the date is written and the wheel nuts would be checked after 50 to 100 kilometers			roll 100
115918	CHECKLINK® sticker "Standard" • Checktag® sticker "Standard" is visual record for the date and kilometers when the wheel was last removed from the vehicle			roll 100

Precision fitment

- The simplest way to fix and centralise the wheel assembly on the brake drum.



115921



115910



115942

Ref. No.	Description
115921	EASYFIX Wheel stud aligner, universal long
115910	EASYFIX Wheel stud aligner, Scania
115942	Safety Wheel stud aligner

TYRE FITTING AND HANDLING

Stud and Bolt Cleaners



115985



115987



115989



115990

Ref. No.	Description	Contents
115985	Stud and bolt cleaner, M20	each
115987	Stud and bolt cleaner, M22	each
115989	Stud and bolt cleaner, M24	each
115990	Stud and bolt cleaner, M30	each

HubBuddy Cleaner



108990



108995

Ref. No.	Description	Contents
108990	"HubBuddy" XL Impact Surface Cleaner <ul style="list-style-type: none"> Includes: 1 Hub Buddy XL attachment and 1 cleaning disc head Removes rust, corrosion and other build-up from wheel stud, drums and tyre rim Helps proper torque of lug nuts by removing corrosion Helps correct torqueing wheel nuts by removing corrosion 	each
108995	"HubBuddy" Replacement Pad 2"	each

TYRE FITTING AND HANDLING

Dip Tanks

Dip tanks - car/4WD



5193963



5193974



5193968

Ref. No.	Description
5193963	<p>Square Dip Tank Metal</p> <ul style="list-style-type: none"> The square metal dip tank can be mounted in a corner if space is a problem, it sits on legs which can be bolted to the floor. This ensures the tank is at the normal working height. The tank has enough depth to ensure the tyre is completely submerged. At the bottom of the tank is a drain hole
5193974	<p>Round Dip Tank Metal</p> <ul style="list-style-type: none"> The round tank can be placed anywhere either indoors or outside. It sits in a cradle that can be bolted to the floor and ensures the tank is at normal working height This tank has a side positioned hole into which a drain tap can be fitted and enough depth to completely submerge the tyre.
5193968	<p>Dip Tank with Depressor</p> <ul style="list-style-type: none"> Enables the wheel to be completely submerged without operator trying to push it under water..

Dip tanks - truck

Ref. No.	Description
5193967	<p>Dip Tank Truck With Lifter</p> <ul style="list-style-type: none"> Heavy duty dip tank and lifter for submersing larger truck tyres for puncture and bead leak identification. Also compatible with motorcycle, car and light truck tyres.

